



Voi-Shan • Tridair • Screwcorp

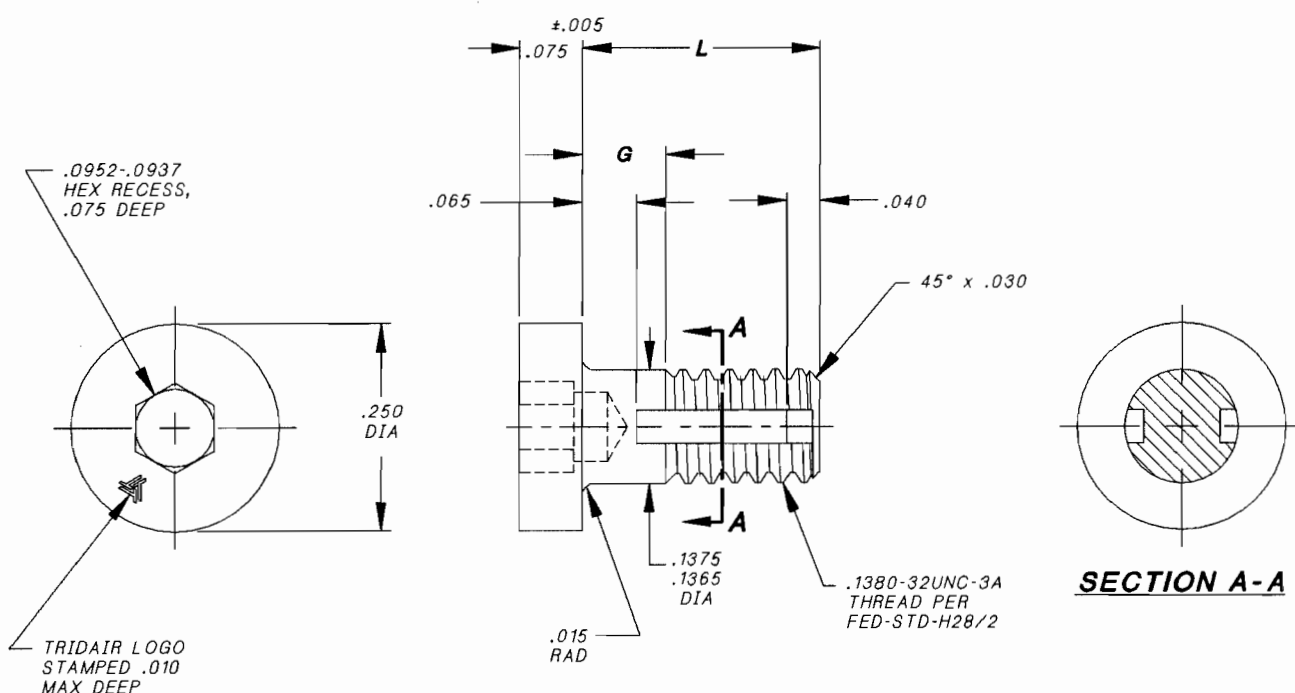

( )	L	G
-0375	.375	.110
-1225	1.225	.975
-0312	.312	.100
-0500	.500	.100

NOTES; UNLESS OTHERWISE SPECIFIED:

- MATERIAL: 13-8PH CRES PER AMS5629.
- HEAT TREAT: CONDITION RH1000 PER MIL-H-6875.
- FINISH: PASSIVATED PER QQ-P-35.
- MINIMUM ULTIMATE TENSILE STRENGTH = 1,195 LBS. (CALCULATED)
- SCREW TO BE USED WITH A CA2210-06R CRIMP-ON RETAINING RING TO CAPTIVATE TO PANEL.
- PANEL PREPARATION: REFER TO CAL-STD-0260.
- INSTALLATION: REFER TO TRIDAIR DRAWING CA2210T-( ).
- PART CALLOUT EXAMPLE:  
CA22048-06-0375



INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
N/A	10/21/00	94301

PROJECT NUMBER: 96-108

APPROVED DATE	6 DEC 96
REV. LETTER AND DATE	12 JUL 90
ECN NUMBER	ECN 39300

**Fairchild AEROSPACE FASTENER DIVISION**  
**ENGINEERING CENTER**  
 3000 WEST LOMITA BOULEVARD  
 TORRANCE, CA 90505

**SCREW, CAPTIVE, SOCKET HEAD,**  
**06-32 SIZE**  
**13-8PH CRES**

CAGE CODE	29372
TRIDAIR PRODUCT	
CA22048-06-( )	
SHEET 1	OF 1

SCANNED