



Howmet Fastening Systems

Phone: Sales +1 800 992 4444

Technical Support +1 310 784 6409

Email: HFSTechSupport@howmet.com

Website: www.hfs.howmet.com

RF5000-13 - Adapter - Port Connection, Ring Locked to Beam Seal Tube End, 4000 and 5000 PSI System


THREAD: AS8879 Class-3A

1. MATERIALS:


- Fitting: 6Al-4V titanium per AMS4928, AMS4965 Or AMS4967, 130 KSI UTS MIN.
- Lockring: A286 cres per AMS5731, AMS5732, AMS5734 or AMS5737, 34-40 HRC.

2. FINISH:


- Fitting: Anodic Treatment Per AMS2488, Type 2.
- Lockring: Passivate per AMS2700, Type 2.

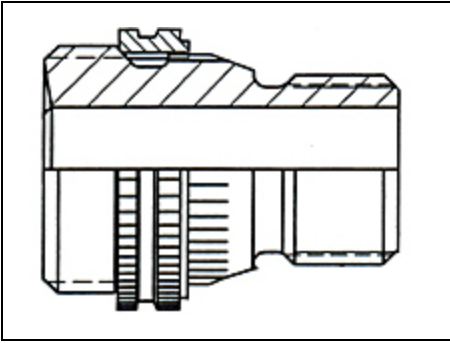


1




[RF5002-13](#)




[RF5003-13](#)




[RF5004-13](#)

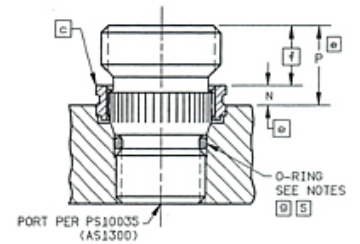


[RF5005-13](#)




[RF5006-13](#)




[RF5008-13](#)




[RF5010-13](#)

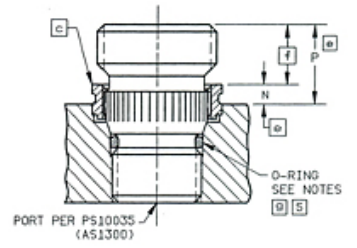


[RF5012-13](#)




[RF5014-13](#)




[RF5016-13](#)




[RF5020-13](#)

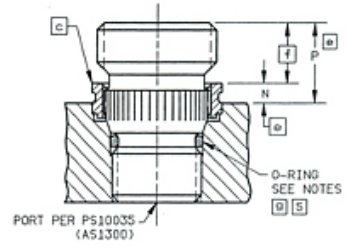

[RF5020T13](#)



[RF5024-13](#)



[RF5024T13](#)