


CATALOG PART NO.	L DIM. MIN	L DIM. MAX	SDIM. MIN	SDIM. MAX	WT LBS PER 100 PCS
26537-1	.511	.526	.76	.79	.989
	-.2	.541	.556	.79	.999
	-.3	.571	.586	.82	1.01
	-.4	.601	.616	.85	1.02
	-.5	.631	.646	.88	1.03
	-.6	.661	.676	.91	1.04
	-.7	.691	.706	.94	1.05
	-.8	.721	.736	.97	1.06
	-.9	.751	.766	1.00	1.07
	-.10	.781	.796	1.03	1.08
	-.11	.811	.826	1.06	1.10
	-.12	.841	.856	1.09	1.11
	-.13	.871	.886	1.12	1.12
	-.14	.901	.916	1.15	1.13
26537-15	.931	.946	1.18	1.14	

FOR DASH NO GREATER THAN -15:  
 L MIN = .491 + (.030 X DASH NO.),  
 L MAX = L MIN + .015.  
 S DIM = .73 + (.03 X DASH NO.)  
 WT LBS PER 100 PCS = .978 + (.0106 X DASH NO.)

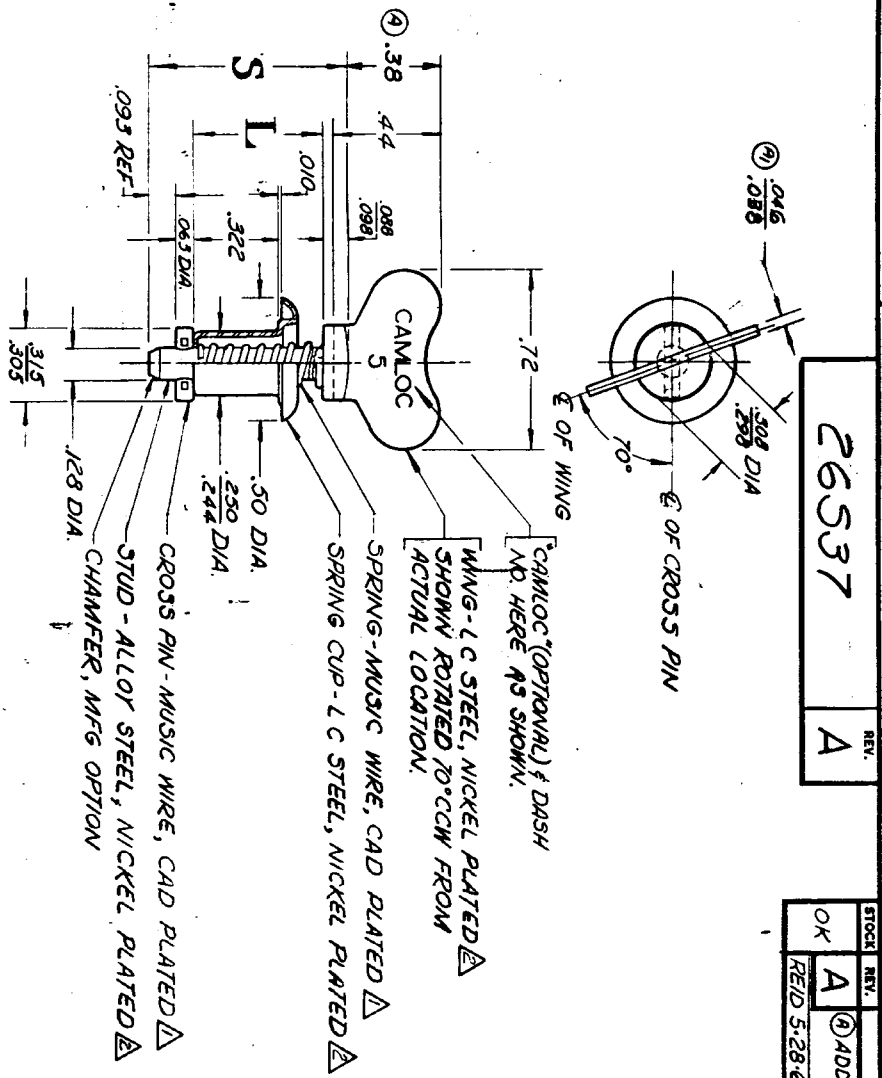

- 4. NICKEL PLATE PER QQ-N-290, CLASS I, TYPE II.
- 3. CAD PLATE PER QQ-P-416A, CLASS 2, TYPE II.
- 2. CROSS PIN WILL WITHSTAND 10 LB PUSHOUT FORCE & RETAIN 5MM ABOUT Q OF STUD WITHIN 1.02.
- 1. FOR INSTALLATION PROCEDURE, SEE CAMLOC CATALOG, 2600 SERIES.

C.D.E. 1:00  
**26537** REV. **A**

STOCK REV.	CHANGE
OK <b>A</b>	<b>ADDED "38" (M) WAS "045-046"</b>
REV'D 5-28-65 J.K.M.	REV'D 6/15

THIS DOCUMENT IS PROTECTED BY COMMON LAW COPYRIGHT. IT IS HEREBY GRANTED TO THE USER BY PERMISSION OF THE COPYRIGHT HOLDER FOR REPRODUCTION FOR PERSONAL USE ONLY. ALL OTHER RIGHTS ARE RESERVED.	
FINISH	AS NOTED
HEAT TREATMENT	STUD: HARDENED
MATERIAL	AS NOTED
TOLERANCES UNLESS OTHERWISE SPECIFIED:	1 PRACTICE: 8. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.
ACTUAL SIZE	(WING ROTATED TO CCW)
<b>Roxyford</b> CAMLOC FASTENER CORPORATION PARAMUS, NEW JERSEY	
STUD ASSEMBLY WING HEAD, NICKEL PLATED	
REV.	<b>A</b>