


Voi-Shan • Tridair • Screwcorp

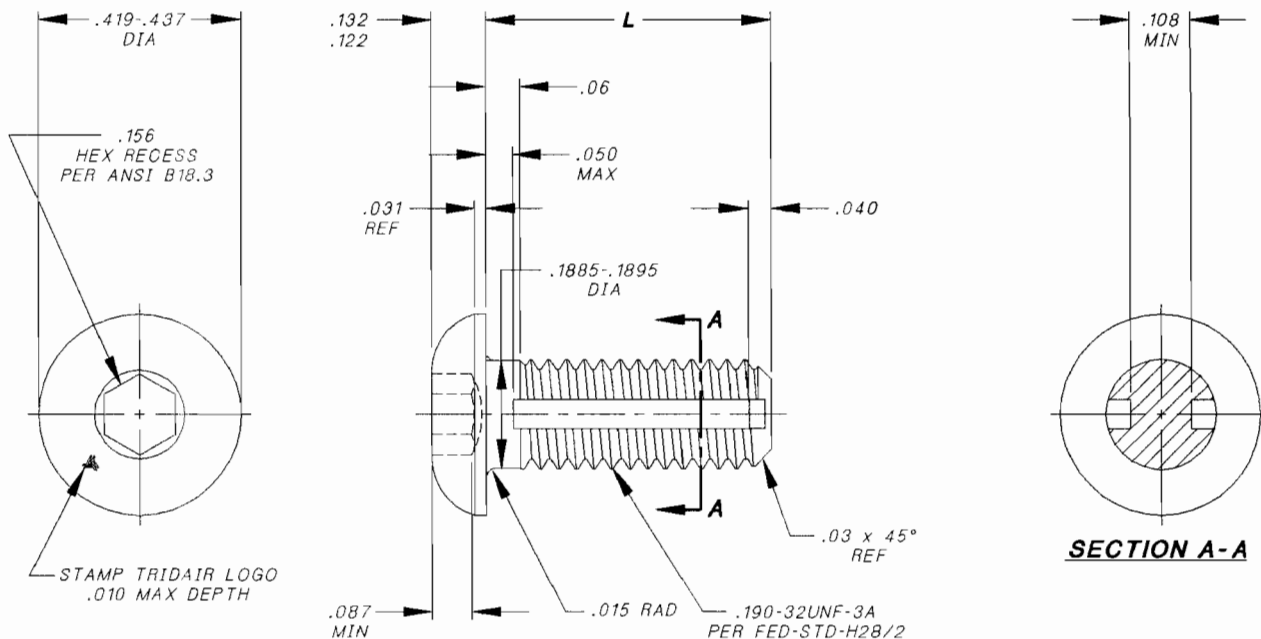


NOTES, UNLESS OTHERWISE SPECIFIED:

1. MATERIAL:
 - 1.1 A286 CRES PER AMS5731 OR AMS5737.
2. HEAT TREAT:
 - 2.1 160 KSI MINIMUM.
3. FINISH:
 - 3.1 PASSIVATE PER QQ-P-35.
4. ULTIMATE TENSILE STRENGTH: 2,425 LBS MINIMUM.
5. SCREW TO BE USED WITH A CA2210-10R RETAINING RING TO CAPTIVATE TO PANEL.
6. PANEL PREPARATION: REFER TO CAL-STD-0260 DRAWING.
7. INSTALLATION: REFER TO CA2210T-() DRAWING.

9. TOLERANCES, UNLESS OTHERWISE SPECIFIED: .XX ±.02, .XXX ±.010, ANGLES ±2°.

10. PART CALLOUT EXAMPLE:

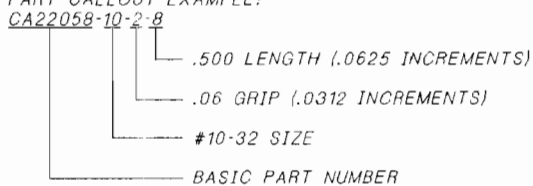

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
N/A	10/21/10	94 301

S14033 PROJECT NUMBER: 97-016

APPROVED DATE	3 OCT 96
REV. LETTER AND DATE	3 OCT 96
ECN NUMBER	ECN 33207

Fairchild AEROSPACE FASTENER DIVISION
ENGINEERING CENTER
 3000 WEST LOMITA BOULEVARD
 TORRANCE, CA 90505

CAGE CODE **29372**
 TRIDAIR PRODUCT

CAPTIVE SCREW
OVERSIZE BUTTON HEAD, HEX RECESS
A286 CRES, 160 KSI

CA22058

SHEET 1 OF 1

SCANNED