


NOTES:

1. MATERIAL: 17-4PH CRES PER AMS5643.
2. HEAT TREAT: COND.H1025, 155,000 PSI MIN. PER MIL-H-6875.
3. FINISH: CADMIUM PLATE PER QQ-P-416 TYPE II, CL. 2.
4. SCREW TO BE USED WITH CA21062-4R RETAINING RING TO CAPTIVATE TO PANEL.
5. INSTALLATION: SEE CAL-STD-0140, SHEET 6.
6. PART CALLOUT: CA2213C-4

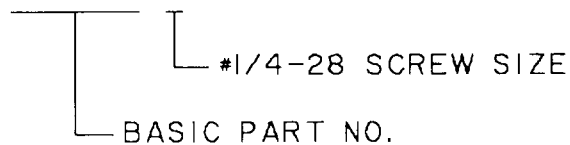

DRAWING PROVIDES FORM, FIT AND FUNCTION DATA. DO NOT ATTEMPT TO MANUFACTURE PRODUCT USING THIS DRAWING.

DRAWN BY: V. MARINI	DATE 3-2-90
MFG. ENGR. BY: J. Kunal	DATE 3/8/90
APPROVED BY: <i>[Signature]</i>	DATE 3/6/90
PROJECT NUMBER 90-121	

TITLE: CAPTIVE SCREW, HEX HEAD 17-4PH CRES, CAD PLATED		
UNLESS OTHERWISE SPECIFIED: TOLERANCES: DECIMALS: .XX ±.02 .XXX ±.010 ANGLES: 2°	MILLIMETERS ± 0.50 ± 0.25	SURFACE FINISH 125 MICROINCHES

Tridair fasteners
REXNORD SPECIALTY FASTENER DIVISION
 3000 W. LOMITA BOULEVARD
 TORRANCE, CA. 90505

CA2213C-4

FSC: 29372 SHEET | OF |

REVISION - ECO 23921 VJM 3-2-90