90º Offset Lever Tools

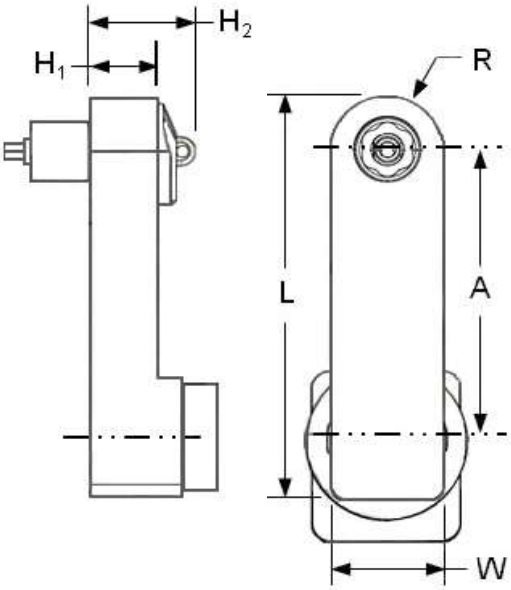

600 in-lbs

LTV38N68 Atlas Motor Required

RPM at Socket: 240

Model Number	No. of Gears	A	H_1	H_2	L	W	R
CT5463A	5	3.19" [81.0mm]	.69" [17.6mm]	1.0" [26.3mm]	4.44" [112.8mm]	1.37" [34.9mm]	.68" [17.3mm]

This is a very durable tool design for general purpose applications and is designed for use in a flush condition or with extended sockets and hex keys when required.

This gear head has 360° indexing capability.

Table 1
Frangible Collar
Hex Size (Across Flats)

Code	Hex Size
437	7/16"
500	1/2"
562	9/16"
625	5/8"
687	11/16"
750	3/4"

Table 2
Ext'd.Socket Length

Code	Extension
A	Flush
E	5/8"
G	1.0"
J	2.0"

Table 3
Key Hex Size

Code	Size
000	NA
125T	1/8"
156T	5/32"
187T	3/16"
219T	7/32"
250T	1/4"

.687 Max A/F Flush Socket Gear

Example of Complete Tool Model Number:

CT5463A 750 G 187T

- 187T — Hex Key Size (Table 3)
- G — Extended Socket Length (Table 2)
- 750 — Fastener Hex Size (Table 1)
- CT5463A — Tool Model Number

HOWMET AEROSPACE