


Offset Pistol Grip Tools

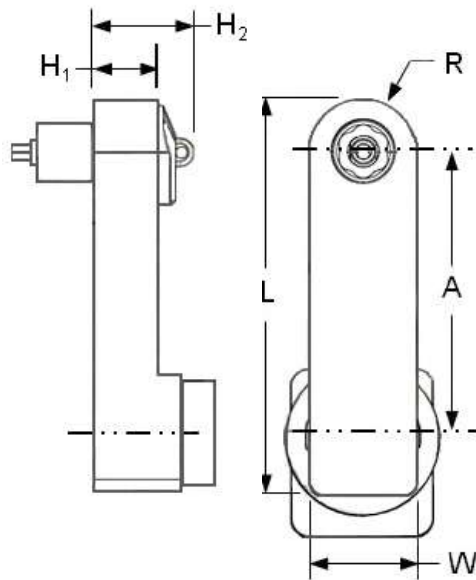


Model Number	No. of Gears	A	H ₁	H ₂ (With Hex Key)	L	W	R
CTL1420	5	3.38" [85.9mm]	.68" [17.3mm]	1.0" [25.4mm]	4.44" [112.7mm]	1.0" (25.4mm)	.50" (12.2mm)

The above tool model is designed for use with a flush socket gear or extended sockets.

Table 1 Frangible Collar Hex Size (Across Flats)		Table 2 Ext'd.Socket Length		Table 3 Hex Keys (See Table 5, Accessories)		Table 4 Drive Shaft Extended Length		
Code	Hex Size	Code	Extension	Code	Size	Code	Length	Index Unit
375	3/8"	C	0.375"	094T	3/32" Hex Key	A	-	With
437	7/16"	D	0.500"	125T	1/8" Dia. Hex Key	B	-	Without
500	1/2"	E	0.625"	156T	5/32" Dia. Hex Key	C	2.0"	With
562	9/16"	G	1.0"	187T	3/16" Dia. Hex Key	D	2.0"	Without
		J	2.0"					

Example of Complete Tool Model Number:

CTL1420 A 500 G 156T



Hex Key Size (Table 3)
Extended Socket Length (Table 2)
Fastener Hex Size (Table 1)
Ext'd. Drive Shaft (Table 4)
Tool Model Number