



Offset Pistol Grip Tools

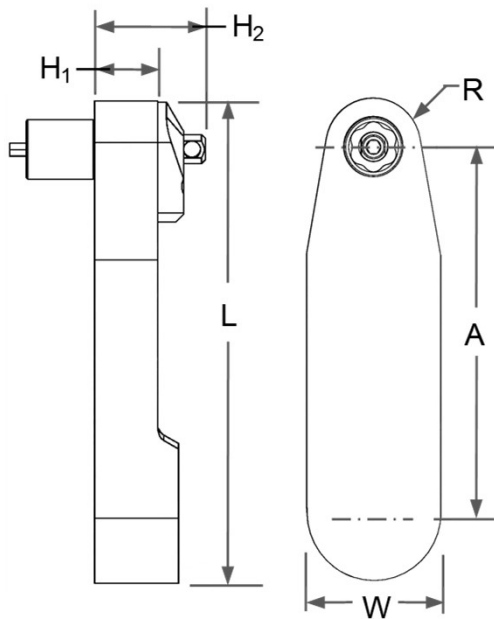

Max Torque 140 In-Lb.

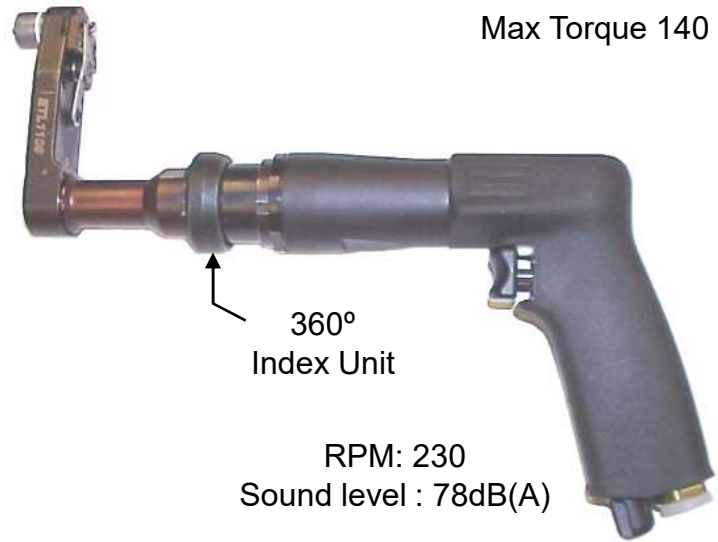

Model Number	No. of Gears	A	H ₁	H ₂	L	W	R
CTL1429	5	2.68 [68.1mm]	.47 [11.9mm]	.81 [20.5mm]	3.53 [89.7mm]	1.0 [25.4mm]	.35 [8.8mm]

Table 1

Frangible Collar

Hex Size (Across Flats)

Code	Hex Size
219	7/32"
250	1/4"
312	5/16"
343	11/32"
437	7/16"

Table 2

Extended Socket Length

Code	Extension
A	Flush
C	3/8"
D	1/2"
E	5/8"
F	3/4"
G	1.0"
J	2.0"

Table 3a

Key Hex Size

Code	Hex Size
062	1/16"
078	5/64"
094	3/32"

Table 3b

Aster™ Key

Code	Dia.
000	No Key
AK2	-2
AK3	-3
AK3A	-3A
AK4	-4

Table 4

Drive Shaft Length with 360° Index Capability

Code	Length	Index Unit
A	-	With
C	2.0"	With
G	6.0"	With

Maximum Flush Socket is 5/16" (.312) Hex

Example of Complete Tool Model Number:

CTL1429 C 312 E 078

- Hex Key Size (Table 3a) or Aster™ Key Size (Table 3b)
- Extended Socket Length (Table 2)
- Fastener Hex Size (Table 1)
- Ext'd. Drive Shaft (Table 4)
- Tool Model Number