
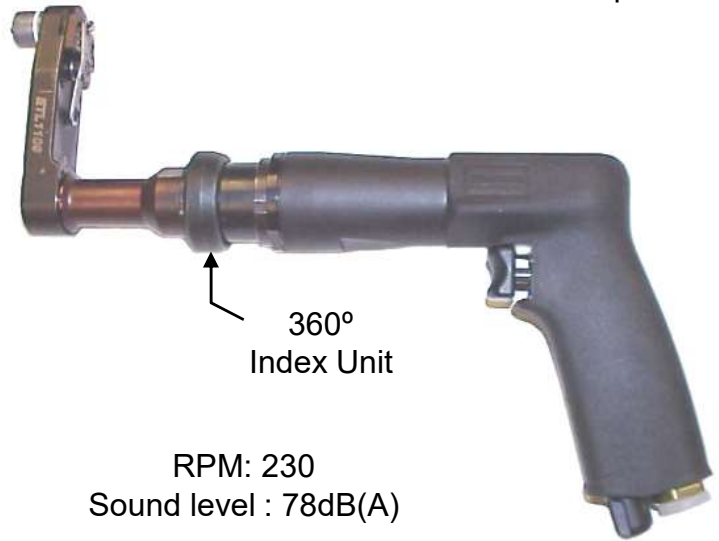


Offset Pistol Grip Tools

Max Torque 140 In-Lbs

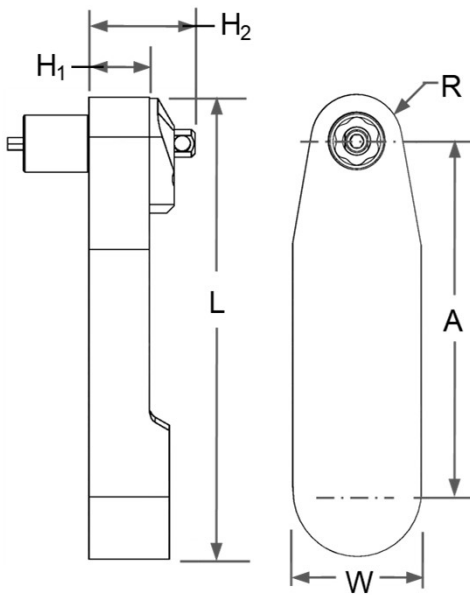

Model Number	No. of Gears	A	H ₁	H ₂	L	W	R
CTL1439	5	2.68" [68.1mm]	.38" [9.5mm]	.69" [17.5mm]	3.53" [89.7mm]	1.0" [25.4mm]	.35" [8.8mm]

Table 1 Frangible Collar Hex Size (Across Flats)		Table 2 Extended Socket Length		Table 3a Key Hex Size		Table 3b Aster™ Key		Table 4 Drive Shaft Length with 360° Index Capability		
Code	Hex Size	Code	Extension	Code	Hex Size	Code	Dia.	Code	Length	Index Unit
219	7/32"	A	Flush	062	1/16"	000	No Key	A	-	With
250	1/4"	C	3/8"	078	5/64"	AK2	-2	C	2.0"	With
312	5/16"	D	1/2"	094	3/32"	AK3	-3	G	6.0"	With
343	11/32"	E	5/8"			AK3A	-3A			
437	7/16"	F	3/4"			AK4	-4			
		G	1.0"							
		J	2.0"							

Maximum Flush Socket is 5/16" (.312) Hex

Example of Complete Tool Model Number:

CTL1439 C 312 E 078

