


# Offset Pistol Grip Tools



Max Torque 130 in-lbs.

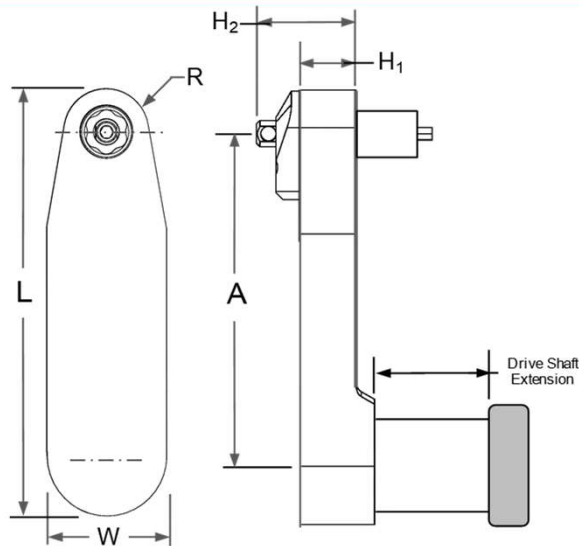

RPM: 275  
Sound level : 78dB

## Back Drive Socket Position

| Model Number   | No. of Gears | A             | H <sub>1</sub> | H <sub>2</sub> | L             | R           |
|----------------|--------------|---------------|----------------|----------------|---------------|-------------|
| <b>CTL1449</b> | 4            | 1.96 [49.8mm] | .47 [11.8mm]   | .81 [20.5mm]   | 2.81 [71.4mm] | .35 [8.8mm] |

**Table 1**  
Frangible Collar  
Hex Size (Across Flats)

| Code | Hex Size |
|------|----------|
| 219  | 7/32"    |
| 250  | 1/4"     |
| 312  | 5/16"    |
| 343  | 11/32"   |
| 375  | 3/8"     |
| 437  | 7/16"    |

**Table 2**  
Ext'd.Socket Length

| Code | Extension |
|------|-----------|
| C    | 0.375"    |
| D    | 0.500"    |
| E    | 0.625"    |
| G    | 1.0"      |
| J    | 2.0"      |

**Table 3**  
Key Hex Size

| Code | Size          |
|------|---------------|
| 062  | 1/16" Hex Key |
| 078  | 5/64" Hex Key |
| 094  | 3/32" Hex Key |

**Table 4**  
Drive Shaft Length  
with 360° Index Unit

| Code | Length |
|------|--------|
| A    | -      |
| C    | 2.0"   |
| G    | 6.0"   |

Largest flush socket gear size is 5/16" A/F

Example of Complete Tool Model Number:

**CTL1449 C 343 D 078**

