


Offset Pistol Grip Tools



Max Torque 140 in-lbs.

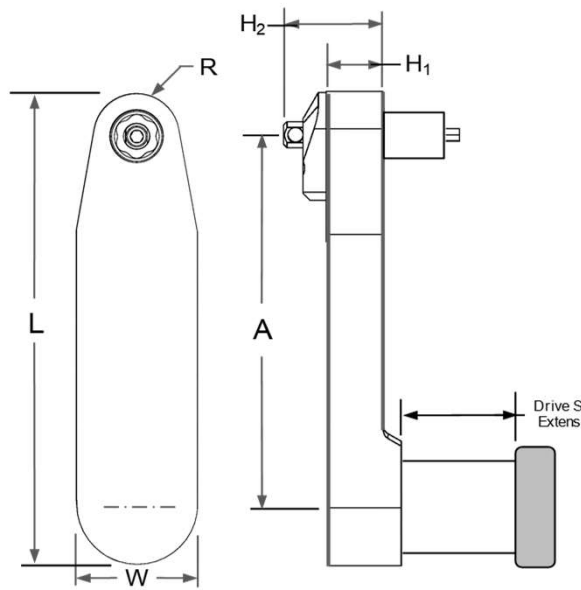

RPM: 230
Sound level : 78dB(A)

Back Drive Socket Position

Model Number	No. of Gears	A	H ₁	H ₂	L	R
CTL1715	6	3.38 [85.9mm]	.47 [11.9mm]	.66 [16.7mm]	4.20 [106.7mm]	.33 [8.3mm]

Table 1

Frangible Collar
Hex Size (Across Flats)

Code	Hex Size
219	7/32"
250	1/4"
312	5/16"

Table 2

Ext'd.Socket Length

Code	Extension
C	0.375"
D	0.500"
E	0.625"
G	1.0"
J	2.0"

Table 3

Key Hex Size

Code	Size
062	1/16" Hex Key
078	5/64" Hex Key
094	3/32" Hex Key

Table 4


Drive Shaft Length
with 360° Index Unit

Code	Length
A	-
C	2.0"
G	6.0"

Largest flush socket gear size is 5/16" A/F

Example of Complete Tool Model Number:

CTL1715 C 312 D 078



Hex Key Size (Table 3)
Extended Socket Length (Table 2)
Fastener Hex Size (Table 1)
Ext'd. Drive Shaft (Table 4)
Tool Model Number