


90° Offset Lever Tools



Torque Max: 140 in-lbs

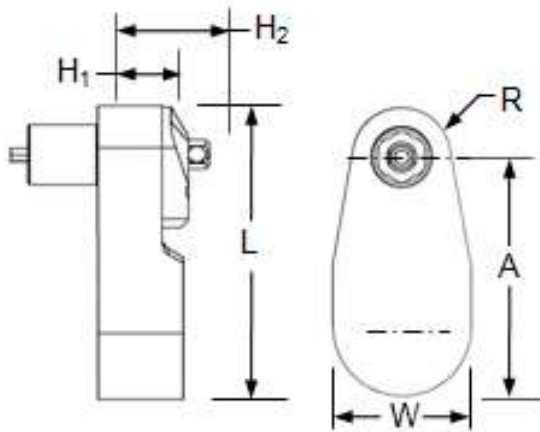

250 RPM at Socket

Model Number	No. of Gears	A	H ₁	H ₂	L	W	R
CTL5428A	3	1.25" [31.8mm]	.47" [11.9mm]	.81" [20.5mm]	2.1" [53.3mm]	1.0" [25.4mm]	.35" [8.8mm]

This is a very durable tool design for general purpose applications and is designed for use in a flush condition or with extended sockets and hex keys when required.

This gear head has 360° indexing capability.

Table 1 Frangible Collar Hex Size (Across Flats)	Table 2 Ext'd.Socket Length	Table 3 Key Hex Size																																																			
<table><tr><th>Code</th><th>Hex Size</th></tr><tr><td>219</td><td>7/32"</td></tr><tr><td>250</td><td>1/4"</td></tr><tr><td>282</td><td>9/32"</td></tr><tr><td>312</td><td>5/16"</td></tr><tr><td>343</td><td>11/32"</td></tr><tr><td>375</td><td>3/8"</td></tr><tr><td>437</td><td>7/16"</td></tr></table>	Code	Hex Size	219	7/32"	250	1/4"	282	9/32"	312	5/16"	343	11/32"	375	3/8"	437	7/16"	<table><tr><th>Code</th><th>Extension</th></tr><tr><td>A *</td><td>Flush</td></tr><tr><td>C</td><td>0.375"</td></tr><tr><td>D</td><td>0.500"</td></tr><tr><td>E</td><td>0.625"</td></tr><tr><td>F</td><td>0.750"</td></tr><tr><td>G</td><td>1.0"</td></tr><tr><td>J</td><td>2.0"</td></tr></table>	Code	Extension	A *	Flush	C	0.375"	D	0.500"	E	0.625"	F	0.750"	G	1.0"	J	2.0"	<table><tr><th>Code</th><th>Size</th><th>Hex Key P/N</th></tr><tr><td>062T</td><td>1/16" 2-Pc Hex Key</td><td>093-9337</td></tr><tr><td>078T</td><td>5/64" 2-Pc Hex Key</td><td>093-9334</td></tr><tr><td>094T</td><td>3/32" 2-Pc Hex Key</td><td>093-9333</td></tr></table> <table><tr><td>062</td><td>1/16" 1-Pc Hex Key</td><td rowspan="3">Depends on socket length</td></tr><tr><td>078</td><td>5/64" 1-Pc Hex Key</td></tr><tr><td>094</td><td>3/32" 1-Pc Hex Key</td></tr></table>	Code	Size	Hex Key P/N	062T	1/16" 2-Pc Hex Key	093-9337	078T	5/64" 2-Pc Hex Key	093-9334	094T	3/32" 2-Pc Hex Key	093-9333	062	1/16" 1-Pc Hex Key	Depends on socket length	078	5/64" 1-Pc Hex Key	094	3/32" 1-Pc Hex Key
Code	Hex Size																																																				
219	7/32"																																																				
250	1/4"																																																				
282	9/32"																																																				
312	5/16"																																																				
343	11/32"																																																				
375	3/8"																																																				
437	7/16"																																																				
Code	Extension																																																				
A *	Flush																																																				
C	0.375"																																																				
D	0.500"																																																				
E	0.625"																																																				
F	0.750"																																																				
G	1.0"																																																				
J	2.0"																																																				
Code	Size	Hex Key P/N																																																			
062T	1/16" 2-Pc Hex Key	093-9337																																																			
078T	5/64" 2-Pc Hex Key	093-9334																																																			
094T	3/32" 2-Pc Hex Key	093-9333																																																			
062	1/16" 1-Pc Hex Key	Depends on socket length																																																			
078	5/64" 1-Pc Hex Key																																																				
094	3/32" 1-Pc Hex Key																																																				


* Flush sockets only available in (.219, .250, .282, .312) hex sizes

24P

24P

Example of Complete Tool Model Number:

CTL5428A 250 C 078

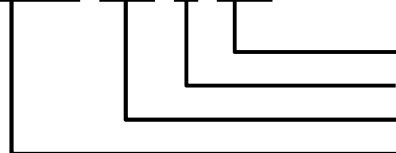

Hex Key Size (Table 3)
Extended Socket Length (Table 2)
Fastener Hex Size (Table 1)
Tool Model Number