

NO LICENSE IS REQUIRED FOR THE DISSEMINATION OF THE COMMERCIAL INFORMATION CONTAINED HEREIN TO FOREIGN PERSONS OTHER THAN THOSE FROM OR IN TERRORIST SUPPORTING COUNTRIES IDENTIFIED IN THE UNITED STATES EXPORT ADMINISTRATION REGULATIONS (EAR) (15 CFR 730-744) OR SPECIALLY DESIGNATED NATIONALS IDENTIFIED BY THE U.S. DEPARTMENT OF TREASURY OFFICE OF FOREIGN ASSETS CONTROL (OFAC). IT IS THE RESPONSIBILITY OF THE INDIVIDUAL IN CONTROL OF THIS DATA TO ABIDE BY U.S. EXPORT LAWS.

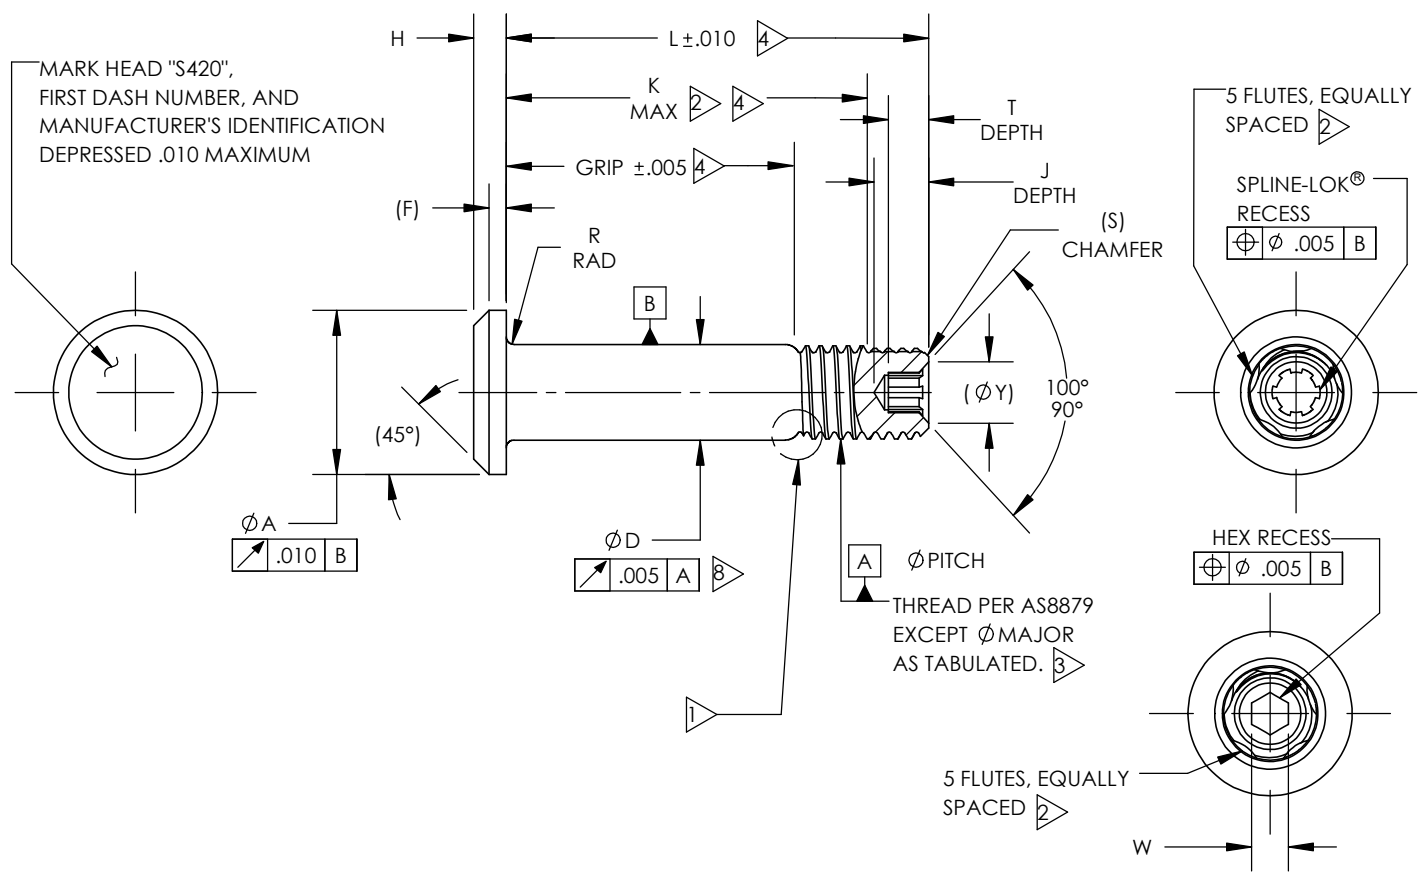


TABLE I - DIMENSIONS & MECHANICAL PROPERTIES

FIRST DASH NO.	Ø NOM	THREADS (MODIFIED)		Ø A	Ø D				(F)	H	R	(S)
		THREAD SIZE	Ø MAJOR MOD		BEFORE FINISH	AFTER FINISH						
					MIN	ALL	IVD ALUMINUM and ALUMINUM PIGMENTED COATING	NONE				
5	5/32	.1640-32 UNJC-3A	.1595 .1565	.322 .306	.1621	.1635	.1625	.1630	.030	.060 .055	.025 .015	1/32" X 45°
6	3/16	.1900-32 UNJF-3A	.1840 .1810	.377 .357	.1881	.1895	.1885	.1890	.035	.074 .064	.025 .015	1/32" X 45°
8	1/4	.2500-28 UNJF-3A	.2440 .2410	.440 .415	.2481	.2495	.2485	.2490	.045	.090 .080	.025 .015	1/32" X 45°
10	5/16	.3125-24 UNJF-3A	.3060 .3020	.505 .475	.3106	.3120	.3110	.3115	.055	.112 .102	.030 .020	3/64" X 45°
12	3/8	.3750-24 UNJF-3A	.3680 .3640	.600 .565	.3731	.3745	.3735	.3740	.075	.140 .130	.030 .020	3/64" X 45°

DIMENSIONS AND TOLERANCE PER ASME Y14.5-2018.  
 DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.  
 DIMENSIONS APPLY AFTER FINISH, AND BEFORE SOLID FILM LUBE AND CETYL ALCOHOL LUBE UNLESS OTHERWISE SPECIFIED.  
 SURFACE TEXTURE PER ASME B46.1. HEAD TO SHANK FILLET, THREAD FLANKS, THREAD ROOT, SHANK ("D" DIAMETER) AND BEARING SURFACE OF HEAD, 32 MICROINCHES RA. OTHER SURFACES, 125 MICROINCHES RA.

**PIN, EDDIE BOLT® 2, PROTRUDING TENSION HEAD, HEX OR SPLINE-LOK® SOCKET RECESS,  
 95 KSI MIN SHEAR, 6AL-4V TITANIUM**



**HOWMET AEROSPACE PART STANDARD**

HOWMET FASTENING SYSTEMS  
 CITY OF INDUSTRY OPERATIONS  
 135 N. UNRUH AVE., CITY OF INDUSTRY, CA 91744

**ELS420**

REV: **R**  
 REV DATE: 20-JUL-2023  
 SHEET 1 OF 6

DATA CLASSIFICATION: GENERAL

ECCN: EAR99

CAGE CODE: **1RC86**

NO LICENSE IS REQUIRED FOR THE DISSEMINATION OF THE COMMERCIAL INFORMATION CONTAINED HEREIN TO FOREIGN PERSONS OTHER THAN THOSE FROM OR IN TERRORIST SUPPORTING COUNTRIES IDENTIFIED IN THE UNITED STATES EXPORT ADMINISTRATION REGULATIONS (EAR) (15 CFR 730.744) OR SPECIALLY DESIGNATED NATIONALS IDENTIFIED BY THE U.S. DEPARTMENT OF TREASURY OFFICE OF FOREIGN ASSETS CONTROL (OFAC). IT IS THE RESPONSIBILITY OF THE INDIVIDUAL IN CONTROL OF THIS DATA TO ABIDE BY U.S. EXPORT LAW.

TABLE I - DIMENSIONS & MECHANICAL PROPERTIES (CONTINUED)

FIRST DASH NO.	Ø NOM	SPLINE-LOK®				DOUBLE SHEAR STRENGTH LBF MIN	TENSILE STRENGTH LBF MIN
		(Ø Y)	T MIN DEPTH	J MAX DEPTH	W HEX		
5	5/32	.100	.075	.140	.0806 .0791	4,010	2,180
6	3/16	.120	.075	.140	.0806 .0791	5,380	3,180
8	1/4	.160	.090	.160	.0967 .0947	9,300	5,820
10	5/16	.189	.125	.210	.1295 .1270	14,600	9,200
12	3/8	.242	.120	.205	.1617 .1582	21,000	14,000

**PROCUREMENT SPECIFICATION:** EBS2202.


**MATERIAL:** 6AL-4V TITANIUM ALLOY PER AMS4928 OR AMS4967.

**HEAT TREAT:** 95,000 PSI SHEAR MINIMUM.

**FINISH:**

- NC = NO FINISH, AND CETYL LUBE PER AS87132.
- NF = DRY FILM LUBE PER AS5272, TYPE I (HEAD & SHANK ONLY, OVERSPRAY PERMITTED) AND CETYL LUBE PER AS87132.
- NN = NO FINISH AND NO LUBE.
- JC = ALUMINUM PIGMENTED COATING PER PS103 ON HEAD AND SHANK ONLY, CETYL LUBE PER AS87132; ▷
- VC = IVD ALUMINUM COATING PER MIL-DTL-83448, TYPE II, CLASS 3 ON HEAD AND SHANK ONLY, AND CETYL LUBE PER AS87132 ▷

**PART CODE & EXAMPLE:**

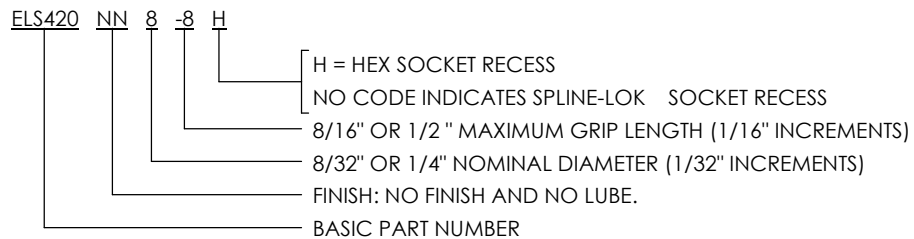

**GENERAL NOTES:**

- 1 ▷ BLENDED RADIUS TRANSITION PERMITS USE IN INTERFERENCE FIT APPLICATION.
- 2 ▷ FLUTE LOCATION ("K" DIMENSION) AND GEOMETRY ARE INSPECTED PER SPECIFICATION E106.
- 3 ▷ THREADS MUST ACCEPT A AS8879 "GO" RING GAGE TO ASSURE FREE RUNNING NUT CAPABILITY. AS8879 LIMITS DO NOT APPLY TO THREADS IN THE FLUTED PORTION OF THE THREAD. THE Ø MINOR AND Ø PITCH MAY BE UP TO .004 BELOW AS8879 MINIMUM VALUES AND Ø MAJOR MAY BE UP TO .002 BELOW SHEET 1 VALUES FOR A DISTANCE EQUAL TO THE FLUTE LENGTH PLUS 1.5P MAX.
- 4 ▷ SEE TABLE III.
- 5. PINS MUST BE PACKAGED OR REPACKAGED IN CLEAR SEALED BAGS. EACH BAG MUST BE MARKED WITH PURCHASER'S AND MANUFACTURER'S COMPLETE PART NUMBER, MANUFACTURER'S LOT NUMBER, MANUFACTURER'S OR DISTRIBUTOR'S NAME, AND THE PACK DATE.
- 6. PARTS WITH A MANUFACTURE DATE ON OR AFTER APRIL 7, 2011, MUST HAVE THE SPLINE-LOK RECESS PETALS REMOVED IN ACCORDANCE WITH EBS2202. THE REQUIREMENTS OF EBS2202 ARE NOT APPLICABLE TO PARTS WITH A MANUFACTURE DATE PRIOR TO APRIL 7, 2011; THESE PARTS ARE ACCEPTABLE FOR USE UNTIL INVENTORIES ARE DEPLETED.
- 7 ▷ ALUMINUM COATING / IVD ALUMINUM COATING TO BE APPLIED ON HEAD AND SHANK ONLY. PARTIAL COATING IS ALLOWED IN THE THREAD RUNOUT AREA FOR A MAXIMUM DISTANCE OF .030 FROM THE END OF THE GRIP.
- 8 ▷ RUNOUT MEASURED WHEN HELD ON THE Ø PITCH OF THE COMPLETE THREADS NEAREST THE SHANK AND CHECKED ON Ø WITHIN ONE DIAMETER OF THE THREAD RUNOUT.

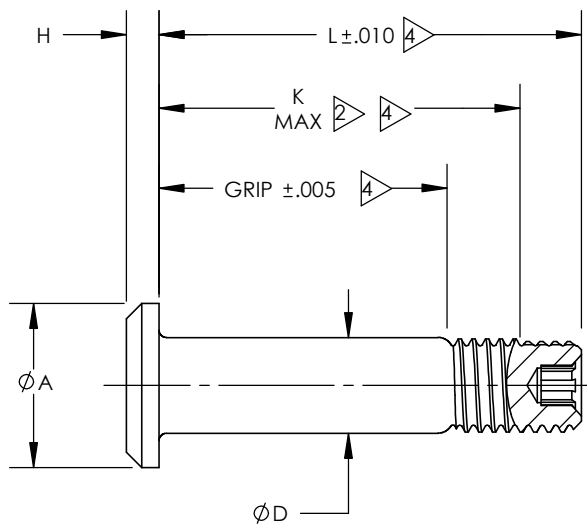
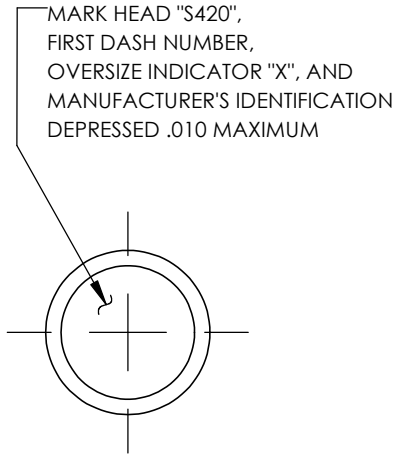


TABLE II (.0156 OVERSIZE) - DIMENSIONS & MECHANICAL PROPERTIES


DASH NUMBER	ØD				DOUBLE SHEAR STRENGTH LBF MIN
	BEFORE FINISH	AFTER FINISH			
	IVD ALUMINUM and ALUMINUM PIGMENTED COATING	ALL	IVD ALUMINUM and ALUMINUM PIGMENTED COATING	NONE	
	MIN	MAX	MIN	MIN	
5-( )X	NO .0156 OVERSIZE AVAILABLE				
6-( )X	.2012	.2026	.2016	.2021	6,130
8-( )X	.2637	.2651	.2641	.2646	10,490
10-( )X	.3262	.3276	.3266	.3271	16,000
12-( )X	.3887	.3901	.3891	.3896	22,700

**GENERAL NOTES (CONTINUED):**

9. FOR DIMENSIONS NOT SHOWN, SEE SHEETS 1 AND 2.
10. FOR MATERIAL, FINISH AND LUBE INFORMATION, SEE SHEETS 1 AND 2.

**PART CODE & EXAMPLE:**

ELS420 NN 8 -8 X H

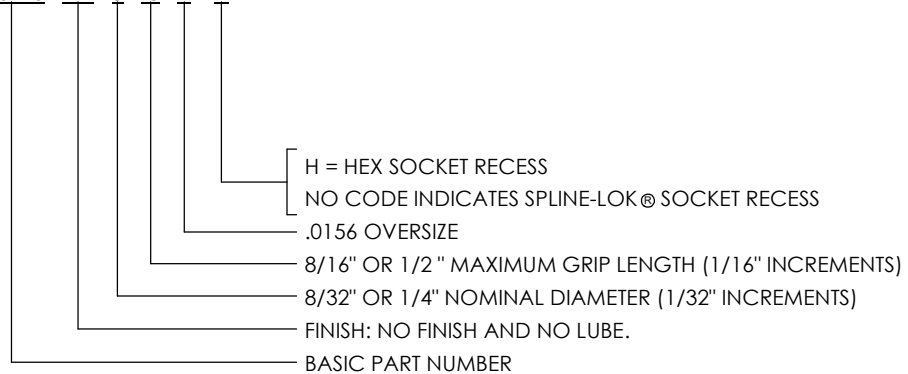

NO LICENSE IS REQUIRED FOR THE DISSEMINATION OF THE COMMERCIAL INFORMATION CONTAINED HEREIN TO FOREIGN PERSONS OTHER THAN THOSE FROM OR IN TERRORIST SUPPORTING COUNTRIES IDENTIFIED IN THE UNITED STATES EXPORT ADMINISTRATION REGULATIONS (EAR) (15 CFR 730.744) OR SPECIALLY DESIGNATED NATIONALS IDENTIFIED BY THE U.S. DEPARTMENT OF TREASURY OFFICE OF FOREIGN ASSETS CONTROL (OFAC). IT IS THE RESPONSIBILITY OF THE INDIVIDUAL IN CONTROL OF THIS DATA TO ABIDE BY U.S. EXPORT LAW.

TABLE III - FOR STANDARD & 1/64" (.0156) OVERSIZE PINS

SECOND DASH NO.	STRUCTURAL THICKNESS		GRIP ± .005	Ø5		Ø6		Ø8		Ø10		Ø12	
	MIN	MAX		K MAX	L ± .010	K MAX	L ± .010	K MAX	L ± .010	K MAX	L ± .010	K MAX	L ± .010
1	.000	.062	.062	.208	.348	.233	.368	.264	.413	.357	.508	.397	.548
2	.063	.125	.125	.270	.410	.295	.430	.326	.475	.419	.570	.459	.610
3	.126	.188	.188	.333	.472	.358	.492	.389	.538	.482	.632	.522	.673
4	.189	.250	.250	.395	.535	.420	.555	.451	.600	.544	.695	.584	.735
5	.251	.312	.312	.457	.598	.482	.618	.513	.662	.606	.758	.646	.797
6	.313	.375	.375	.520	.660	.545	.680	.576	.725	.669	.820	.709	.860
7	.376	.438	.438	.583	.722	.608	.742	.639	.788	.732	.882	.772	.923
8	.439	.500	.500	.645	.785	.670	.805	.701	.850	.794	.945	.834	.985
9	.501	.562	.562	.707	.848	.732	.868	.763	.912	.856	1.008	.896	1.047
10	.563	.625	.625	.770	.910	.795	.930	.826	.975	.919	1.070	.959	1.110
11	.626	.688	.688	.833	.972	.858	.992	.889	1.038	.982	1.132	1.022	1.173
12	.689	.750	.750	.895	1.035	.920	1.055	.951	1.100	1.044	1.195	1.084	1.235
13	.751	.812	.812	.957	1.098	.982	1.118	1.013	1.162	1.106	1.258	1.146	1.297
14	.813	.875	.875	1.020	1.160	1.045	1.180	1.076	1.225	1.169	1.320	1.209	1.360
15	.876	.938	.938	1.083	1.222	1.108	1.242	1.139	1.288	1.232	1.382	1.272	1.423
16	.939	1.000	1.000	1.145	1.285	1.170	1.305	1.201	1.350	1.294	1.445	1.334	1.485
17	1.001	1.062	1.062	1.207	1.348	1.232	1.368	1.263	1.412	1.356	1.508	1.396	1.547
18	1.063	1.125	1.125	1.270	1.410	1.295	1.430	1.326	1.475	1.419	1.570	1.459	1.610
19	1.126	1.188	1.188	1.333	1.472	1.358	1.492	1.389	1.538	1.482	1.632	1.522	1.673
20	1.189	1.250	1.250	1.395	1.535	1.420	1.555	1.451	1.600	1.544	1.695	1.584	1.735
21	1.251	1.312	1.312	1.457	1.598	1.482	1.618	1.513	1.662	1.606	1.758	1.646	1.797
22	1.313	1.375	1.375	1.520	1.660	1.545	1.680	1.576	1.725	1.669	1.820	1.709	1.860
23	1.376	1.438	1.438	1.583	1.722	1.608	1.742	1.639	1.788	1.732	1.882	1.772	1.923
24	1.439	1.500	1.500	1.645	1.785	1.670	1.805	1.701	1.850	1.794	1.945	1.834	1.985
25	1.501	1.562	1.562	1.707	1.848	1.732	1.868	1.763	1.912	1.856	2.008	1.896	2.047
26	1.563	1.625	1.625	1.770	1.910	1.795	1.930	1.826	1.975	1.919	2.070	1.959	2.110
27	1.626	1.688	1.688	1.833	1.972	1.858	1.992	1.889	2.038	1.982	2.132	2.022	2.173
28	1.689	1.750	1.750	1.895	2.035	1.920	2.055	1.951	2.100	2.044	2.195	2.084	2.235
29	1.751	1.812	1.812	1.957	2.098	1.982	2.118	2.013	2.162	2.106	2.258	2.146	2.297
30	1.813	1.875	1.875	2.020	2.160	2.045	2.180	2.076	2.225	2.169	2.320	2.209	2.360
31	1.876	1.938	1.938	2.083	2.222	2.108	2.242	2.139	2.288	2.232	2.382	2.272	2.423
32	1.939	2.000	2.000	2.145	2.285	2.170	2.305	2.201	2.350	2.294	2.445	2.334	2.485

DASH NUMBER INDICATES MAX GRIP LENGTH IN .0625 INCREMENTS; LONGER LENGTHS MAY BE SPECIFIED BY USE OF WHOLE DASH NUMBERS ONLY.

MARK HEAD "S420",  
 FIRST DASH NUMBER,  
 OVERSIZE INDICATOR "Y", AND  
 MANUFACTURER'S IDENTIFICATION  
 DEPRESSED .010 MAXIMUM

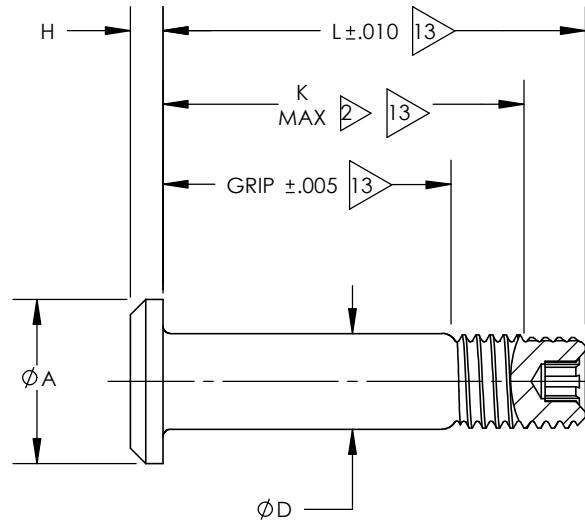



TABLE IV (.0312 OVERSIZE) - DIMENSIONS & MECHANICAL PROPERTIES

DASH NUMBER	Ø D				DOUBLE SHEAR STRENGTH LBF MIN
	BEFORE FINISH	AFTER FINISH			
	IVD ALUMINUM and ALUMINUM PIGMENTED COATING	ALL	IVD ALUMINUM and ALUMINUM PIGMENTED COATING	NONE	
	MIN	MAX	MIN	MIN	
5-( )Y	USE STANDARD DIAMETER ELS420NN6-( )				
6-( )Y	.2168	.2182	.2172	.2177	7,100
8-( )Y	.2793	.2807	.2797	.2802	11,800
10-( )Y	.3418	.3432	.3422	.3427	17,600
12-( )Y	.4043	.4057	.4047	.4052	24,600


**GENERAL NOTES (CONTINUED):**

11. FOR DIMENSIONS NOT SHOWN, SEE SHEETS 1 AND 2.
12. FOR MATERIAL, FINISH AND LUBE INFORMATION, SEE SHEETS 1 AND 2.

SEE TABLE V.

**PART CODE & EXAMPLE:**

ELS420 NN 8 -8 Y H

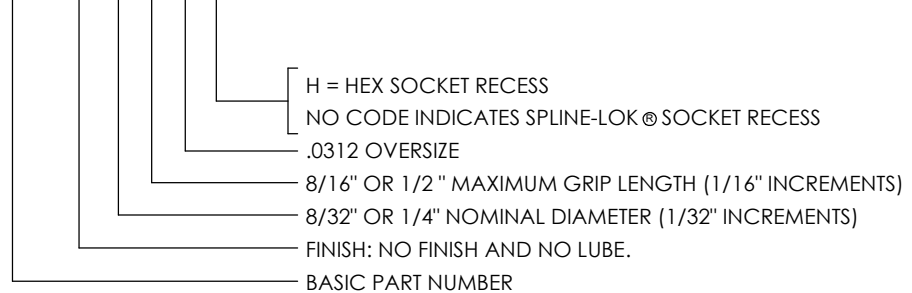

NO LICENSE IS REQUIRED FOR THE DISSEMINATION OF THE COMMERCIAL INFORMATION CONTAINED HEREIN TO FOREIGN PERSONS OTHER THAN THOSE FROM OR IN TERRORIST SUPPORTING COUNTRIES IDENTIFIED IN THE UNITED STATES EXPORT ADMINISTRATION REGULATIONS (EAR) (15 CFR 730.744) OR SPECIALLY DESIGNATED NATIONALS IDENTIFIED BY THE U.S. DEPARTMENT OF TREASURY OFFICE OF FOREIGN ASSETS CONTROL (OFAC). IT IS THE RESPONSIBILITY OF THE INDIVIDUAL IN CONTROL OF THIS DATA TO ABIDE BY U.S. EXPORT LAW.

TABLE V - FOR 1/32" (.0312) OVERSIZE PINS

SECOND DASH NO.	STRUCTURAL THICKNESS		GRIP ± .005	Ø6		Ø8		Ø10		Ø12	
	MIN	MAX		K MAX	L ± .010	K MAX	L ± .010	K MAX	L ± .010	K MAX	L ± .010
1	.000	.062	.062	.253	.388	.299	.448	.392	.553	.442	.593
2	.063	.125	.125	.315	.450	.361	.510	.454	.615	.504	.655
3	.126	.188	.188	.378	.512	.424	.573	.517	.677	.567	.718
4	.189	.250	.250	.440	.575	.486	.635	.579	.740	.629	.780
5	.251	.312	.312	.502	.638	.548	.697	.641	.803	.691	.842
6	.313	.375	.375	.565	.700	.611	.760	.704	.865	.754	.905
7	.376	.438	.438	.628	.762	.674	.823	.767	.927	.817	.968
8	.439	.500	.500	.690	.825	.736	.885	.829	.990	.879	1.030
9	.501	.562	.562	.752	.888	.798	.947	.891	1.053	.941	1.092
10	.563	.625	.625	.815	.950	.861	1.010	.954	1.115	1.004	1.155
11	.626	.688	.688	.878	1.012	.924	1.073	1.017	1.177	1.067	1.218
12	.689	.750	.750	.940	1.075	.986	1.135	1.079	1.240	1.129	1.280
13	.751	.812	.812	1.002	1.138	1.048	1.197	1.141	1.303	1.191	1.342
14	.813	.875	.875	1.065	1.200	1.111	1.260	1.204	1.365	1.254	1.405
15	.876	.938	.938	1.128	1.262	1.174	1.323	1.267	1.427	1.317	1.468
16	.939	1.000	1.000	1.190	1.325	1.236	1.385	1.329	1.490	1.379	1.530
17	1.001	1.062	1.062	1.252	1.388	1.298	1.447	1.391	1.553	1.441	1.592
18	1.063	1.125	1.125	1.315	1.450	1.361	1.510	1.454	1.615	1.504	1.655
19	1.126	1.188	1.188	1.378	1.512	1.424	1.573	1.517	1.677	1.567	1.718
20	1.189	1.250	1.250	1.440	1.575	1.486	1.635	1.579	1.740	1.629	1.780
21	1.251	1.312	1.312	1.502	1.638	1.548	1.697	1.641	1.803	1.691	1.842
22	1.313	1.375	1.375	1.565	1.700	1.611	1.760	1.704	1.865	1.754	1.905
23	1.376	1.438	1.438	1.628	1.762	1.674	1.823	1.767	1.927	1.817	1.968
24	1.439	1.500	1.500	1.690	1.825	1.736	1.885	1.829	1.990	1.879	2.030
25	1.501	1.562	1.562	1.752	1.888	1.798	1.947	1.891	2.053	1.941	2.092
26	1.563	1.625	1.625	1.815	1.950	1.861	2.010	1.954	2.115	2.004	2.155
27	1.626	1.688	1.688	1.878	2.012	1.924	2.073	2.017	2.177	2.067	2.218
28	1.689	1.750	1.750	1.940	2.075	1.986	2.135	2.079	2.240	2.129	2.280
29	1.751	1.812	1.812	2.002	2.138	2.048	2.197	2.141	2.303	2.191	2.342
30	1.813	1.875	1.875	2.065	2.200	2.111	2.260	2.204	2.365	2.254	2.405
31	1.876	1.938	1.938	2.128	2.262	2.174	2.323	2.267	2.427	2.317	2.468
32	1.939	2.000	2.000	2.190	2.325	2.236	2.385	2.329	2.490	2.379	2.530

DASH NUMBER INDICATES MAX GRIP LENGTH IN .0625 INCREMENTS; LONGER LENGTHS MAY BE SPECIFIED BY USE OF WHOLE DASH NUMBERS ONLY.