


Camloc . Delron . Deutsch . Huck . K-Fast . Kaynar . Microdot . RAM . Rosan . Screwcorp . Tridair . Voi-Shan

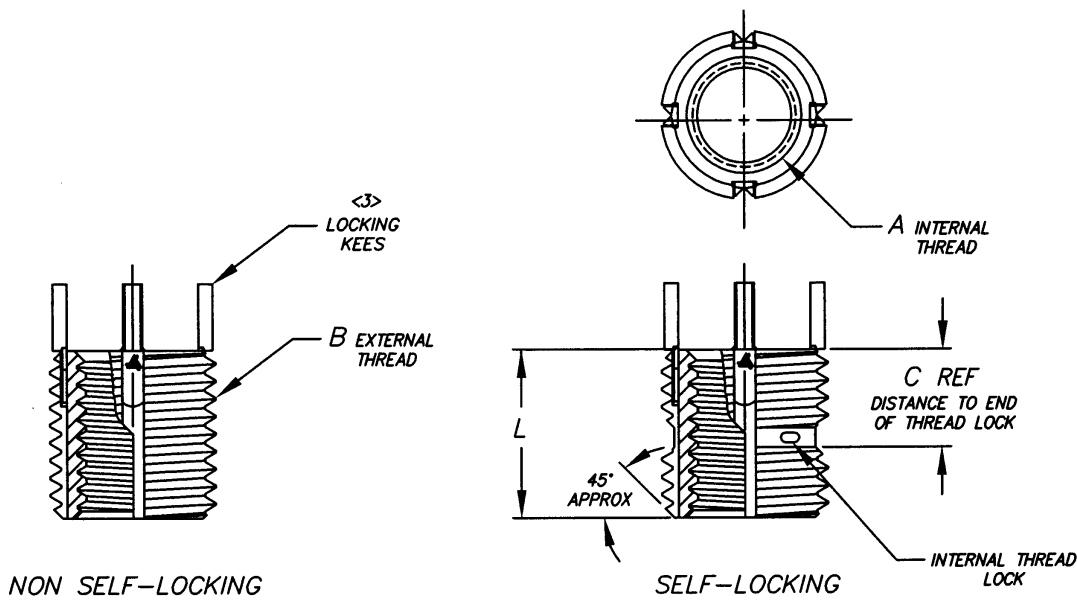


MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN CONSENT IS ABSOLUTELY PROHIBITED

THIS DRAWING EMBODIES A CONFIDENTIAL, PROPRIETARY DESIGN & ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

TABLE I

| PART NUMBER | DIMENSIONS | | | | |
|-------------|---|---|--|---------|-------|
| | A INTERNAL THREAD $\langle \rangle$ CLASS 5H | B EXTERNAL THREAD $\langle \rangle$ CLASS 4h | MIN. SHEAR ENGAG. AREA mm ² | L ± 0,3 | C REF |
| KNM5x0,8 | M5x0,8 | M8x1,25 | 104,9 | 8,0 | 7,6 |
| KNML5x0,8 | | | 83,1 | | |
| KNM5x0,5 | M5x0,5 | M8x1,25 | 104,9 | 8,0 | 7,0 |
| KNML5x0,5 | | | 83,1 | | |
| KNM6x1,0 | M6x1,0 | M10x1,25 | 177,7 | 10,0 | 8,2 |
| KNML6x1,0 | | | 152,7 | | |
| KNM6x0,75 | M6x0,75 | M10x1,25 | 177,7 | 10,0 | 7,3 |
| KNML6x0,75 | | | 152,7 | | |
| KNM8x1,25 | M8x1,25 | M12x1,25 | 266,7 | 12,0 | 9,5 |
| KNML8x1,25 | | | 242,5 | | |
| KNM8x1,0 | M8x1,0 | M12x1,25 | 266,7 | 12,0 | 9,0 |
| KNML8x1,0 | | | 242,5 | | |
| KNM10x1,5 | M10x1,5 | M14x1,5 | 341,6 | 14,0 | 10,0 |
| KNML10x1,5 | | | 316,4 | | |
| KNM10x1,25 | M10x1,25 | M14x1,5 | 341,6 | 14,0 | 9,5 |
| KNML10x1,25 | | | 316,4 | | |
| KNM12x1,75 | M12x1,75 | M16x1,5 | 470,2 | 16,0 | 11,20 |
| KNML12x1,75 | | | 441,4 | | |
| KNM12x1,25 | M12x1,25 | M16x1,5 | 470,2 | 16,0 | 10,20 |
| KNML12x1,25 | | | 441,4 | | |
| KNM14x1,5 | M14x1,5 | M18x1,5 | 608,5 | 18,0 | 10,7 |
| KNML14x1,5 | | | 561,8 | | |
| KNM16x1,5 | M16x1,5 | M20x1,5 | 770,5 | 20,0 | 12,4 |
| KNML16x1,5 | | | 724,4 | | |

| INTERIM DOCUMENT REVISION | | |
|---------------------------|-----------|--------|
| Rev. | Date | DAF# |
| J1 | 10/8/2018 | 117431 |




| | | | |
|--|--|---|--|
| APPROVED DATE 24 FEB 99 |  ARCONIC Arconic Fastening Systems Tridair Products 3000 W. Lomita Blvd. Torrance, California 90505 | TITLE: - KEENSERT INSERT - LIGHTWEIGHT, METRIC | CURRENT DESIGN ACTIVITY: CAGE CODE: 29372 |
| REV. LETTER AND DATE J 10/27/14 sf | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & ASME Y14.5M TOLERANCES: | SALES DRAWING NO. |
| DAF NUMBER 100764 | | ANGLES = ±3° DECIMALS .XX = ±0.02 .XXX = ±0.010 | SHEET 1 OF 3 |

Camloc . Delron . Deutsch . Huck . K-Fast . Kaynar . Microdot . RAM . Rosan . Screwcorp . Tridair . Voi-Shan

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
- <2> THREADS ARE PER BRITISH STANDARD 3643. (I.S.O.)
- <3> INSERTS WITH INTERNAL THREAD SIZE 6 AND UNDER ARE FURNISHED WITH 2 LOCKING KEES. SIZE 8 AND ABOVE SIZES ARE FURNISHED WITH 4 LOCKING KEES.
- <4> MATERIAL CODES:
 - 4.1 STANDARD MATERIAL IS 303 CRES PER AMS 5640 OR ASTM-A-582, OR 303SE PER AMS 5640, AMS 5738 OR ASTM-A-582.
 - 4.2 OPTIONAL MATERIALS WITH THEIR DESIGNATED FINISH:
 - M = CHROME MOLY STEEL, TYPE 4140 PER AMS 5626 OR TYPE 8740 PER AMS 6322. 125 KSI MINIMUM TENSILE STRENGTH. IDENTIFIED BY TWO NON-PARALLEL DASH MARKS ON TOP OF INSERT. CAD PLATE PER AMS-QQ-P-416, TYPE I, CLASS 3.
 - MX = CHROME MOLY STEEL, TYPE 4140 PER AMS 5626 OR TYPE 8740 PER AMS 6322. 160 KSI MINIMUM TENSILE STRENGTH. IDENTIFIED BY TWO PARALLEL DASH MARKS ON TOP OF INSERT. CAD PLATE PER AMS-QQ-P-416, TYPE I, CLASS 3.
 - NIT = ARMC0, NITRONIC 60 CRES PER ASTM-A-479 OR AMS 5848. PASSIVATE PER AMS 2700. IDENTIFIED BY FOUR (4) DASH MARKS APPROXIMATELY 90° APART.
 - SE = 316 CRES PER AMS 5648 OR ASTM A320. IDENTIFIED BY 3 PUNCH MARKS.
 - T = A286 CRES PER AMS 5731, AMS 5732 OR AMS 5737. 140 KSI MINIMUM TENSILE STRENGTH. IDENTIFIED BY ONE DASH MARK ON TOP OF INSERT. PASSIVATE PER AMS 2700.
 - TX = A286 CRES PER AMS 5731, AMS 5732 OR AMS 5737. 160 KSI MINIMUM TENSILE STRENGTH. PASSIVATE PER AMS 2700.
 - TB = 6Al-4V TITANIUM ALLOY PER AMS 4930 OR AMS 4967. 160 KSI MINIMUM TENSILE STRENGTH. THIS MATERIAL CODE IS ONLY AVAILABLE FOR NON-LOCKING PARTS.
 - F = CARBON STEEL, C1215, C12L14 OR 83-420 PER ASTM A108. FINISH SHALL BE PARKERIZE.
- 4.3 KEE MATERIAL FOR ALL STANDARD AND SPECIAL MATERIAL INSERTS IS 302 CRES PER ASTM-A-580 (CHEMISTRY ONLY). CONTACT AFS ENGINEERING FOR OPTIONAL KEE MATERIALS.
- <5> FINISH CODES:
 - NO CODE= PASSIVATE PER AMS 2700.
 - SP = SILVER PLATE PER ASTM-B-700, TYPE 1, GRADE A, CLASS N.
 - SX = CAD. PLATE PER AMS-QQ-P-416 TYPE I, CLASS 3.
 - SY = CAD. PLATE PER AMS-QQ-P-416 TYPE II, CLASS 3.
 - SZ = CAD. PLATE PER AMS-QQ-P-416 TYPE II, CLASS 2.
 - ZB = ZINC PLATE (BLUE BRITE)
 - DRY FILM LUBRICANT ON ALL LOCKING INSERTS UNLESS SPECIFIED BY ADDING "NE" TO FINISH CODE.

6. PART NUMBER EXAMPLE: KNML8x1,25T20SP

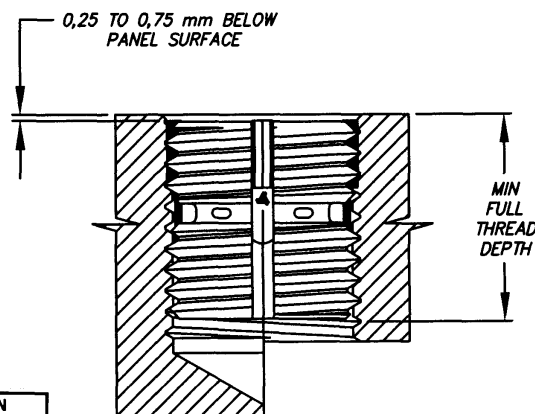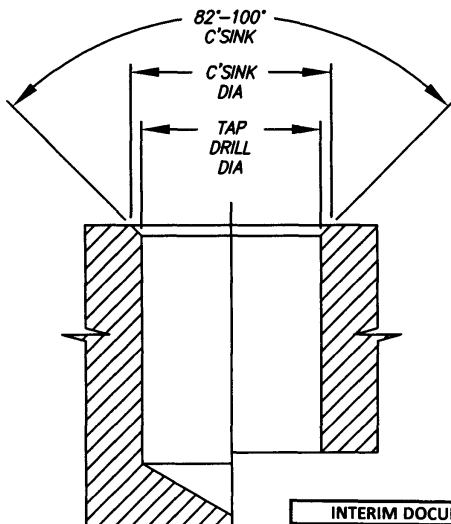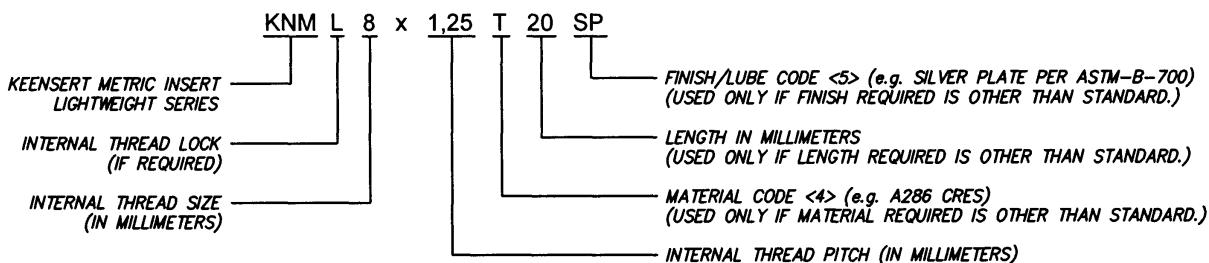

| INTERIM DOCUMENT REVISION | | |
|---------------------------|-----------|--------|
| Rev. | Date | DAF# |
| 71 | 10/8/2018 | 117431 |

BLIND HOLE INSTALLATION THRU HOLE INSTALLATION

MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN CONSENT IS ABSOLUTELY PROHIBITED

THIS DRAWING EMBODIES A CONFIDENTIAL, PROPRIETARY DESIGN & ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

| | | | |
|----------------------------------|---|---|--|
| APPROVED DATE 24 FEB 99 | CURRENT DESIGN ACTIVITY: ARCONIC Arconic Fastening Systems | TITLE: - KEENSERT INSERT - LIGHTWEIGHT, METRIC | CURRENT DESIGN ACTIVITY: CAGE CODE: 29372 |
| REV. LETTER AND DATE 10/27/14 | Tridair Products 3000 W. Lomita Blvd. Torrance, California 90505 | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & ASME Y14.5M TOLERANCES: | SALES DRAWING NO. KNM(L) |
| DAF NUMBER 100764 | | ANGLES = ±3° DECIMALS .XX = ±.02 .XXX = ±.010 | SHEET 2 OF 3 |

Camloc . Delron . Deutsch . Huck . K-Fast . Kaynar . Microdot . RAM . Rosan . Screwcorp . Tridair . Voi-Shan

TABLE II

| PART NUMBER | INSTALLATION DATA | | | | REMOVAL DATA | | |
|-------------|-------------------|------------|---------------|------------|-------------------------------|-------|-------|
| | TAP DRILL DIA | C'SINK DIA | THREAD TAP | | INSTALLATION TOOL PART NUMBER | DRILL | |
| | | | SIZE CLASS 6H | MIN. DEPTH | | SIZE | DEPTH |
| KNM5x0,8 | 7,000 | 8,50 | M8x1,25 | 9,5 | TM-5 | 5,50 | 4,00 |
| KNML5x0,8 | 6,875 | 8,25 | | | | | |
| KNM5x0,5 | 7,000 | 8,50 | M8x1,25 | 9,5 | TM-5 | 5,50 | |
| KNML5x0,5 | 6,875 | 8,25 | | | | | |
| KNM6x1,0 | 8,900 | 10,50 | M10x1,25 | 11,5 | TM-6 | 7,50 | 4,75 |
| KNML6x1,0 | 8,775 | 10,25 | | | | | |
| KNM6x0,75 | 8,900 | 10,50 | M10x1,25 | 11,5 | TM-6 | 7,50 | |
| KNML6x0,75 | 8,775 | 10,25 | | | | | |
| KNM8x1,25 | 10,900 | 12,50 | M12x1,25 | 13,5 | TM-8 | 9,50 | |
| KNML8x1,25 | 10,775 | 12,25 | | | | | |
| KNM8x1,0 | 10,900 | 12,50 | M12x1,25 | 13,5 | TM-8 | 9,50 | |
| KNML8x1,0 | 10,775 | 12,25 | | | | | |
| KNM10x1,5 | 12,930 | 14,50 | M14x1,5 | 15,5 | TM-10 | 11,50 | |
| KNML10x1,5 | 12,775 | 14,25 | | | | | |
| KNM10x1,25 | 12,930 | 14,50 | M14x1,5 | 15,5 | TM-10 | 11,50 | |
| KNML10x1,25 | 12,775 | 14,25 | | | | | |
| KNM12x1,75 | 14,880 | 16,50 | M16x1,5 | 17,5 | TM-12 | 13,50 | |
| KNML12x1,75 | 14,725 | 16,25 | | | | | |
| KNM12x1,25 | 14,880 | 16,50 | M16x1,5 | 17,5 | TM-12 | 13,50 | |
| KNML12x1,25 | 14,725 | 16,25 | | | | | |
| KNM14x1,5 | 16,865 | 18,491 | M18x1,5 | 20,5 | TM-14 | 15,49 | |
| KNML14x1,5 | 16,713 | 18,237 | | | | | |
| KNM16x1,5 | 18,877 | 20,500 | M20x1,5 | 22,5 | TM-20 | 17,50 | |
| KNML16x1,5 | 18,725 | 20,250 | | | | | |

7. CONTACT AFS ENGINEERING FOR MORE OPTIONAL MATERIAL, FINISH, ETC CODES.

8. INSTALLATION PROCEDURES:

- 8.1 PREPARE PANEL PER THE DIMENSIONS SHOWN IN TABLE II.
- 8.2 SCREW IN INSERT WITH FINGERS OR INSTALLATION TOOL. INSERT IS DESIGNED TO STOP AT CORRECT DEPTH.
- 8.3 DRIVE LOCKING KEES DOWN USING THE INSTALLATION TOOL.


9. REMOVAL PROCEDURES:

- 9.1 USE THE DRILL SIZES AND DEPTHS SPECIFIED IN TABLE II TO REMOVE MATERIAL BETWEEN THE KEES.
- 9.2 DEFLECT KEES INWARD AND BREAK OFF.
- 9.3 REMOVE INSERT WITH AN "EASY OUT" TYPE TOOL.

| INTERIM DOCUMENT REVISION | | |
|---------------------------|-----------|--------|
| Rev. | Date | DAF# |
| J1 | 10/8/2018 | 117431 |

MANUFACTURE OF THE PROPRIETARY PARTS SHOWN HERE WITHOUT WRITTEN CONSENT IS ABSOLUTELY PROHIBITED

THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN & ALL DESIGN, MANUFACTURING PRODUCTION, USE & SALE RIGHTS REGARDING SAME ARE EXPRESSLY RESERVED.

| | | | |
|----------------------------------|--|---|---|
| APPROVED DATE 24 FEB 99 |  ARCONIC Arconic Fastening Systems | TITLE: - KEENSERT INSERT - LIGHTWEIGHT, METRIC | CURRENT DESIGN ACTIVITY: CAGE CODE: 29372 |
| REV. LETTER AND DATE 10/27/14 | | | SALES DRAWING NO. |
| DAF NUMBER 100704 | Tridair Products 3000 W. Lomita Blvd. Torrance, California 90505 | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & ASME Y14.5M TOLERANCES: | ANGLES = ±3° DECIMALS .XX = ±.02 .XXX = ±.010 |

KNM(L)