


DATE	REV	CHANGE
01/17/84	A	31(CAS) 38 TMO
3/28/84	B	ECD 12088 J.S. <i>DM</i>

CA17033

B

- NOTES:
1. FLOAT: .030 RADIIALLY FROM CENTER
 2. USE WITH CA1700 SERIES 10-32UNF-38, 4 LEAD THREAD STUD NUTS
 3. RECOMMENDED FOR TEMPERATURES UP TO 500°F

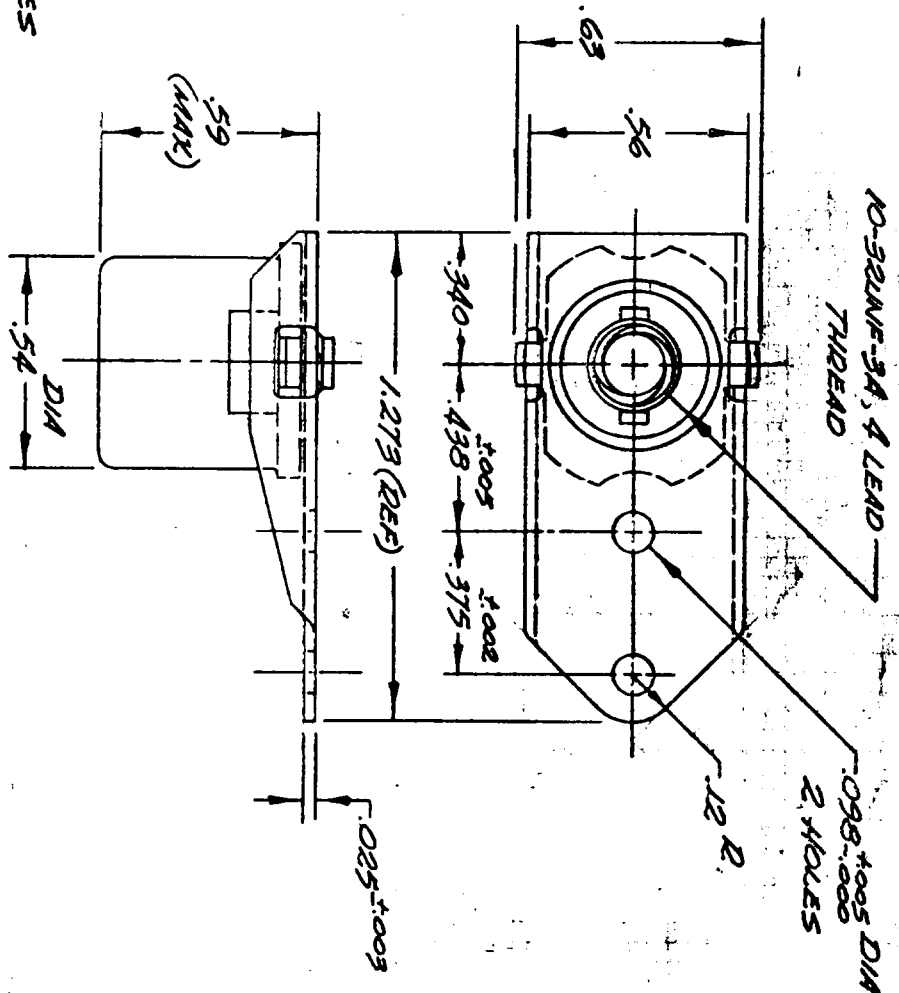

DRAWING PROVIDES FORM, FIT AND FUNCTION DATA. DO NOT ATTEMPT TO MANUFACTURE PRODUCT USING THIS DRAWING.

UNLESS OTHERWISE SPECIFIED 70-086

ANGLE: $\pm .015$	PASSIVATED PER QQ-P-35	HEAT TREAT: 149000 PSI MIN
FEDERAL SUPPLY		
CODE 29372	WEIGHT: <i>224</i> 235 /EA	SCALE: 2:1

QAGE - 17-17PH CRES	AMS 5528
BARREL - 300 SERIES CRES	ASTM-A-582
SCREEN - A-286 CRES	AMS 5731-5737
MATERIAL OR NAME	SPECIFICATION

RECEPTACLE ASSY
ONE LUG, FLOATING

TRIDAIR INDUSTRIES
FASTENER DIVISION
MFRS. OF NEWTON INSERTS AND CAL FAX FASTENERS
3000 W. LOMITA BLVD., TORRANCE, CALIFORNIA, 90505. PHONES: 213-775-7151

SHEET 1 OF 1
CA17033