


# T8059S, T8326C STANDOFF BRACKET

HIGH STRENGTH, RIGHT ANGLE, 450°F, 800°F, 125,000 PSI

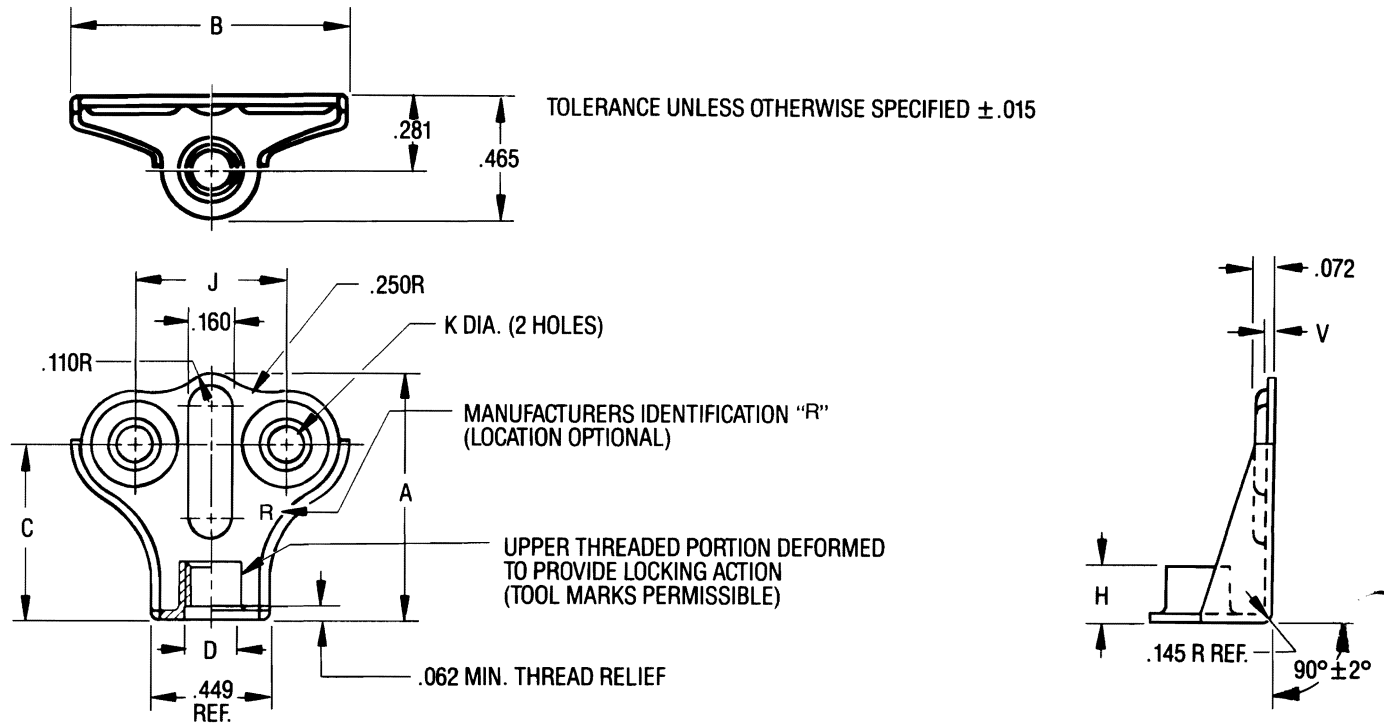

- MATERIAL ..... T8059 - Carbon steel, heat treated to Rc34-41.  
 T8326 - A-286 corrosion resistant steel.
- FINISH ..... T8059 - Cadmium plated per QQ-P-416 plus dry film lubricant (2).  
 T8326 - Silver plate per AMS 2411 (3).
- PROCUREMENT SPEC ... MIL-N-25027
- NOTES ..... (1) Threads per MIL-S-8879 prior to crimp and lubrication.  
 (2) Add suffix "CPC" to part number for cadmium plate per QQ-P-416, Type II, Class 2, without dry film lubricant.  
 (3) Add suffix "M" for passivation with dry film lubricant.

BOOTS PART NUMBER			THREAD SIZE (1)	A	B	C	D	H	J	K	V	WGT
STEEL 450°F	CRES 450°F	CRES 800°F										
T8059S1032B-1	T8326C1032B-1M	T8326C1032B-1	.1900-32 UNJF-3B	.745 .715	1.038	.465 .435	.194	.215 .185	.562	.130	.032	.50
T8059S1032B-2	T8326C1032B-2M	T8326C1032B-2	.1900-32 UNJF-3B	.945 .915	1.038	.665 .635	.194	.215 .185	.562	.130	.032	.65
T8059S1032B-3	T8326C1032B-3M	T8326C1032B-3	.1900-32 UNJF-3B	1.145 1.115	1.038	.865 .835	.194	.215 .185	.562	.130	.032	.80