


Voi-Shan • Tridair • Screwcorp

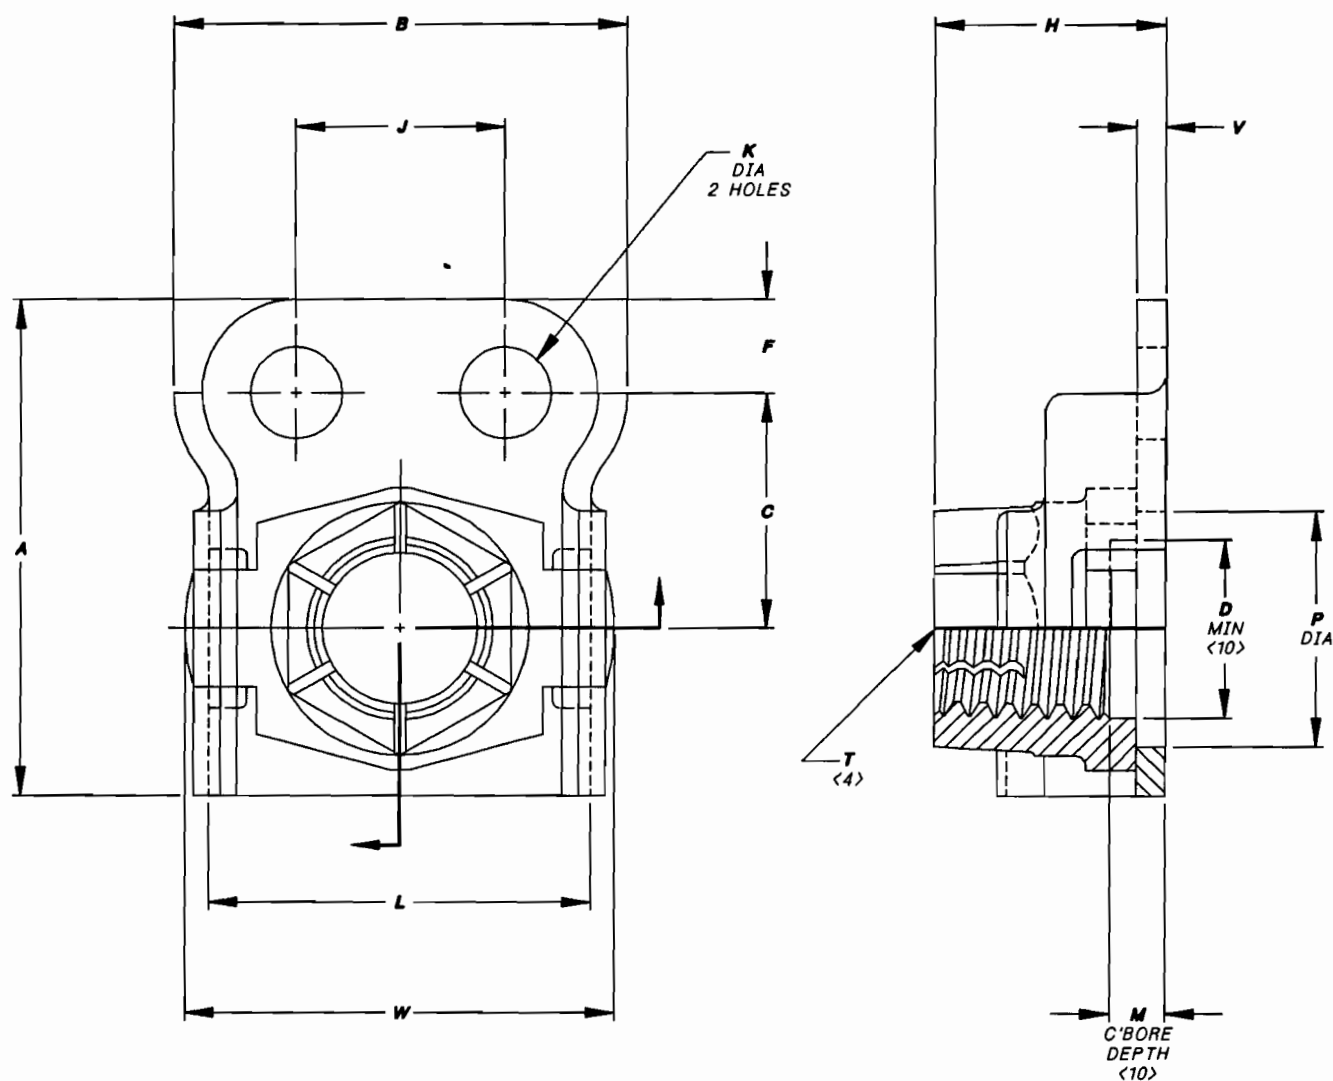

DASH NUMBER	T THREAD SIZE <4>	A MAX	B MAX	C	D DIA MIN	F MIN	H MAX	J	K	L MAX	M MIN	P DIA MAX	V MAX	W
-3	.1900-32UNJF-3B	.525	.490	.250	.194	.100	.250	.221 .217	.103 .098	.409	.062	.240	.032	.460 .410
-4	.2500-28UNJF-3B	.617	.502	.281	.254	.100	.281	.221 .217	.103 .098	.526	.062	.300	.032	.562 .512
-5	.3125-24UNJF-3B	.767	.609	.359	.317	.125	.328	.271 .267	.135 .130	.588	.062	.357	.045	.619 .569

DASH NUMBER	T THREAD SIZE <4>	AXIAL TENSILE STRENGTH LBS MIN	SEATING TORQUE IN-LBS
-3	.1900-32UNJF-3B	2,460	50
-4	.2500-28UNJF-3B	4,580	125
-5	.3125-24UNJF-3B	7,390	220

INTERIM DOCUMENT REVISION		
Rev.	Date	DAF #
G/1	10-21-10	94301

APPROVED DATE

9 OCT 86

REV. LETTER AND DATE

12 DEC 94

ECN NUMBER

ECN-00328

Fairchild AEROSPACE FASTENER DIVISION
ENGINEERING CENTER
 3010 WEST LOMITA BOULEVARD
 TORRANCE, CA 90505

NUT PLATE, FLAT BEAM LOCK
 SIDE BY SIDE, REDUCED RIVET SPACE,
 FLOATING. ALLOY STEEL, 450°F

CAGE CODE **92215**
 TRIDAIR PRODUCT

FBL10018-()

SHEET 1 OF 2

PROJECT NUMBER: 84-188 AND 86-154; 95-067

SCANNED

